

Aiken County  
School District

Date Issued:  
Procurement Officer:  
E-Mail Address:

January 12, 2024  
Kevin Chipman  
KChipman@acpsd.net

Invitation for Bid

REPAIR AND MAINTENANCE OF THE ROOF AT AIKEN ELEMENTARY SCHOOL

The Term "Offer" Means Your "Bid" or "Proposal" Unless submitted on-line your offer must be submitted in a sealed



# AIKEN COUNTY PUBLIC SCHOOLS

INVITATION FOR BID

PROJECT MANUAL

FOR

2024 Installation of Flooring at J. D. Lever Elementary School

BID DATE: February 13, 2024

Bid Number: 21324

## TABLE OF CONTENTS

Schedule of Progress	Page 3
Invitation for Bid	Page 4
Instructions to Bidders	
1.0 Definitions	Page 5
2.0 Bidder's Representation	Page 5
3.0 Interpretation of Bidding Documents	Pages 5-6
4.0 Bidding Procedure	Pages 6-7
5.0 Consideration of Bids	Pages 7-8
6.0 Insurance	Pages 9-10
7.0 Time/Completion Schedule	Pages 10-11
8.0 Progress Payments	Page 12
9.0 Project Closeout	Pages 13-14
10.0 Scope of Work	Page 17
11.0 Description of Work	Pages 17-19
12.0 Schedule	Page 19
13.0 Environmental Condition	Pages 20
14.0 Product Delivery, Storage, & Handling	Page 21
15.0 Quality Assurance	Page 21
16.0 Clean Up	Page 21
17.0 Allowance	Pages 21-22
18.0 Specification	Pages 22-24
19.0 Product: Carpet	Pages 25-26
20.0 Execution	Pages 26-28
21.0 Product: LVT	Pages 28-33
22.0 Product: LVT	Pages 34

# SCHEDULE OF PROGRESS

January 24, 2024

10:00 a.m. Mandatory pre-bid conference J.D.  
Lever Elementary School, 2404 Columbia Hwy.,  
Aiken, South Carolina 29805.

	9:00 a.m. Bid opening at Aiken County Public

INVITATION TO BID

The School District of Aiken County will accept bids for the "2024 Installation of Flooring at J. D. Lever Elementary School." Sealed bids will be received by the Owner

[Redacted content]

1.0 **DEFINITIONS**

1.1 **BIDDING DOCUMENTS** include:

- Invitation for Bid
- Instructions to Bidders

- Bid Proposal Form
- Proposed Contract Documents including any drawings and any addendum issued prior to the receipt of bids
- Bid Bond and notarized Power of Attorney
- Letters of References for similar sized projects

1.2 **CONTRACT DOCUMENTS** include:

Project Manual  
Owner/Contractor Contract Agreement  
Contractor's Performance and Labor and Material Payment Bonds  
Conditions of the Contract General, Supplementary, and other Conditions  
All addendum issued prior to all modifications issued before execution of the contract.

1.3 **UNIT BASE BID** is the sum stated in the bid for which the Bidder offers to do the

**3.0 INTERPRETATION OR CORRECTION OF BIDDING DOCUMENTS**

3.1 The Bidder's shall promptly notify Kevin Chipman, Director of Facilities Construction, at [kchipman@acpsd.net](mailto:kchipman@acpsd.net), Jeremiah Jones, Coordinator of Facilities Construction, at [jjones@acpsd.net](mailto:jjones@acpsd.net) in the event of any ambiguity, inconsistency,





- 4.2 Any written insertions, alterations, or erasures of the bid must be initialed by the Signer of the bid. The bid proposal is to be either type written or made out in ink.
- 4.3 Bids are to be addressed as indicated on Form of Proposal and are to be enclosed and sealed in the envelope with the following information:

- 
- 2. **Bidder's name**
  - 3. **South Carolina Contractor/Specialty License Number**
  - 4. **Address**
  - 5. **Identified with the words "2024 Installation of Flooring at J.D. Lever Elementary School."**

- 4.4 The Bidders are cautioned that it is the responsibility of each individual Bidder to ensure that his/her bid is in the possession of the responsible official or his/her designated alternate prior to the stated time and at the place of bid opening. The Owner is not responsible for bids delayed by mail and/or delivery services of any kind. No bids transmitted by facsimile will be accepted. Bids, amendments thereto,

A. Award of Bid:

It is the intent of the Owner to award a contract to the lowest responsive and responsible Bidder provided the bid have been submitted in accordance with the requirements of the bidding documents and does not exceed the funds available. The Owner shall have the right to waive any informality or irregularity in any bid or bids received and to accept or reject the bid or bids, which in his/her judgment is in the best interest of Aiken County Public

[REDACTED]

1. Executed "Contract Agreement"
2. Performance and Labor and Materials Payment Bond with Power of Attorney
3. Certificate of Insurance

[REDACTED]

C. Qualifications — Bidder's must comply with the following:

1. Comply with all requirements of Local, State, and Federal laws.
2. Have a valid and current South Carolina Contractor/Specialty License, to perform this type work, commensurate with the requirements of the South Carolina State Licensing Board.

[REDACTED]





c. Hired car coverage  
\$250,000/\$500,000 B.I.: 100 P.D.

D. In addition to Contractual Liability including indemnification provision, Bodily Injury and Property Damage coverage under both Comprehensive General and Comprehensive Automobile forms shall include "occurrence" basic wording, which means an event or continuous or repeated exposure to conditions, which unexpectedly causes injury or damage during policy period.

F. The Contractor shall either (a) require each of his/her Subcontractor's to

F. procure and maintain during the life of his/her sub-contract

and Property Damage Liability Insurance of the type and in the same

7.4 These sums are agreed upon as proper measure of liquidated damages, which the

[REDACTED]

Owner will sustain per calendar day, by failure of the Contractor to complete the work by the time stipulated above. This sum is agreed to by both parties, and in no way construed as a penalty.


[REDACTED]

Based upon applications for payment submitted to the Owner by the Contractor, the Owner shall make progress payments up to ninety-six and half percent (96 1/2 %) of the contract price, to the Contractor.

## AIKEN COUNTY PUBLIC SCHOOLS PROJECT CHECKLIST

It is the responsibility of the Architect/Engineer and Contractor to provide the Owner with the documentation on

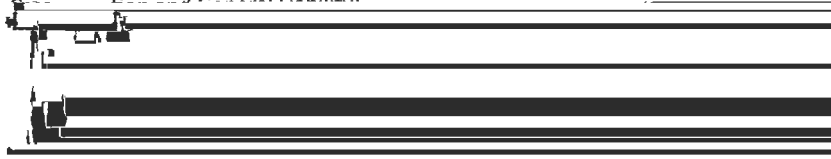

LIST OF SUBCONTRACTORS	Owner
BIDDER'S LICENSE #	Contractor
CONTRACTOR'S LICENSE #	Contractor
ASBESTOS ABATEMENT LICENSE #	Owner
DRUG-FREE WORKPLACE STATEMENT	Owner
CERTIFICATE OF INSURANCE (Workman's Compensation and General Liability)	Owner
	
BID BOND OR BID SECURITY (5%)	Owner
POWER OF ATTORNEY FOR BID BOND	
BID TABULATION SHEET	Owner
16 DAY INTENT-TO-AWARD NOTICE TO ALL BIDDERS FOR PROJECTS OVER \$50,000	Owner
	Owner
BOARD MINUTES OF BID APPROVAL AND AWARD	
SIGNED CONTRACT	Owner
PURCHASE ORDERS	Owner

	RESPONSIBILITY OF:	REC'D	COMMENTS
<b>AIKEN COUNTY SCHOOL DISTRICT PROJECT CHECKLIST (CONTINUED) DOCUMENTATION</b>			
BUILDER'S RISK POLICY	Owner		
CERTIFICATE OF SUBSTANTIAL COMPLETION	Owner		
AGENCY INSPECTIONS (I.E., DHEC, FACILITIES MGT., ETC.)	Owner		
"NO ASBESTOS" CERTIFICATION	Contractor		
FINAL INSPECTION & PUNCHLIST	Owner		
ROOF WARRANTIES	Contractor		
GENERAL CONTRACTOR'S WORKMANSHIP & MATERIAL WARRANTY	Contractor		
SUBCONTRACTOR'S WORKMANSHIP & MATERIAL WARRANTY	Contractor		
OTHER WARRANTIES	Contractor		
O & M MANUALS	Contractor		
O & M TRAINING STATEMENT	Contractor		
LIST OF SUBCONTRACTORS BY SPECIALTY, INCLUDING ADDRESSES AND TELEPHONE NUMBERS	Contractor		
SEPARATE RELEASE OR WAIVERS OF LIENS FROM SUBCONTRACTORS AND SUPPLIERS	Contractor		
<del>CONSENT OF SURETY TO FINAL PAYMENT (AIA FORM G707)</del>	<del>Contractor</del>		
CONTRACTOR'S AFFIDAVIT OF PAYMENT OF DEBTS & CLAIMS (AIA FORM G705)	Contractor		
CONTRACTOR'S AFFIDAVIT OF RELEASE OF LIENS (AIA FORM G706A)	Contractor		
CONTRACTOR'S RELEASE OR WAIVER OF LIENS CONDITIONAL UPON RECEIPT OF FINAL PAYMENT ON CONTRACTORS LETTERHEAD)	Contractor		
CHANGE ORDERS	Owner		
AS-BUILT DRAWINGS PERMANENT INSURANCE POLICY	Owner		



**REQUEST FOR CERTIFICATION OF SUBSTANTIAL COMPLETION**

A. General:

Prior to requesting the Owner's inspection for certification of substantial completion for the entire work, the Contractor must complete the following and list known exceptions in this request:

1. Progress payment request coincident with the first following date claimed, showing either 100% completion for portion of work claimed as "substantially complete" or list incomplete items, value of incomplection, and reasons for being incomplete.
2. Include supporting documents necessary for completion as indicated in these contract documents.
3. Advise the Owner of pending insurance change over requirements.

[Redacted area containing multiple horizontal lines, likely representing a table or form with obscured content.]

maintenance agreements, final certifications, and similar documents. The

Contractor that works is substantially complete and accepted, or advice

acceptance. Results of completed inspection will form initial "punch

list" for final acceptance.

#### **9.4. PREREQUISITES FOR FINAL ACCEPTANCE & FINAL PAYMENT**

Prior to requesting Owner's final inspection for certification of final acceptance and final payment, as required by General Conditions, complete the following and list known exceptions in request:

1. Submit final payment request with final releases and supporting documentation not previously submitted and accepted.
2. Submit final lien waiver from manufacturers and Subcontractor's.

- C. **The School District of Aiken County will pay approved invoices and request for payment within thirty-one (31) days after satisfactory completion and acceptance of the project. Only after this time will late payment charges assessed by the Contractor be honored.**

**10.0 SCOPE OF WORK**

**A. D. Lever Elementary School**

Replace the existing carpet in the rooms that have been provided from page thirty three (43) of specifications. (Highlighted Blue)

- 2. Replace the existing VCT (Highlighted Yellow) with one (1) field color as



Contractors abating if necessary. (The Owner will remove the computers from computers labs. The computer tables will be wired together and left in the rooms for the installers to move during carpet installation.)

3. The Contractor is responsible for the removal of all cove base by scoring and pulling top of cove base downward to avoid tearing sheetrock paper

[REDACTED]

for floating and touch up paint if needed on all CMU and gypsum board wall areas after cove base is removed plus the installation of new cove base in floored areas. It is the Contractor responsibility to patch the damaged sheetrock before installing the cove base, so the cove base lays flush with the wall. **In areas to be abated, the cove base needs to be removed prior to the start of abatement if necessary. (N/A)**

4. The Contractor shall provide a dumpster for debris and coordinate location of that dumpster with the Owner.

5. [REDACTED]

and replacement of the defective areas including costs for new materials as per manufacturer's warranty. All cost for reinstallation during this period to be covered under this warranty regardless of the manufacturer's participation. The warranty to be a letter signed by the Contractor.

[REDACTED]

Department their schedule of work and access to the building. The Contractor will coordinate with the Principal to have the building

[REDACTED]

A. General:

Perform construction in such manner as to eliminate hazards to persons and property; and to minimize interference with use of adjacent areas, utilities, and structures of interruption of use of such facilities; and free passage to and from such adjacent areas of structures.

B. Asbestos:

1. Prior to beginning work, the Contractor will review the Asbestos Management Plan and consult with Jeremiah Jones, Coordinator of Facilities Construction, jjones2@acpsd.net.

2. During the course of the project, should suspect material be uncovered that is not addressed within the Project Plans and

Specifications or the School's Management Plan, the Contractor will:

a. Stop work in this area and not disturb the material.

b. Contact the Coordinator of Facilities Construction for further instruction.

c. Other Requirements:

1. Provide safeguards include warnings, barricades, temporary fences, warning lights, etc. that are required for protection of personnel during installation process.

2. Clean adjacent structures and improvement of dirt and debris caused by operations to existing prior to this work


#### 14.0 PRODUCT DELIVERY, STORAGE, AND HANDLING

In a manner to prevent, damage before, during, and after installation, until acceptance by the Owner. The Owner will not accept deliveries of materials that is the Contractor's responsibility.

#### 15.0 QUALITY ASSURANCE

- A. Installation shall be in accordance with the latest applicable codes and requirements, and in accordance with manufacturer's installation instructions.
- B. All materials shall be new and as specified and shall not be submitted unless approved by the Owner.

#### 16.0 CLEAN-UP

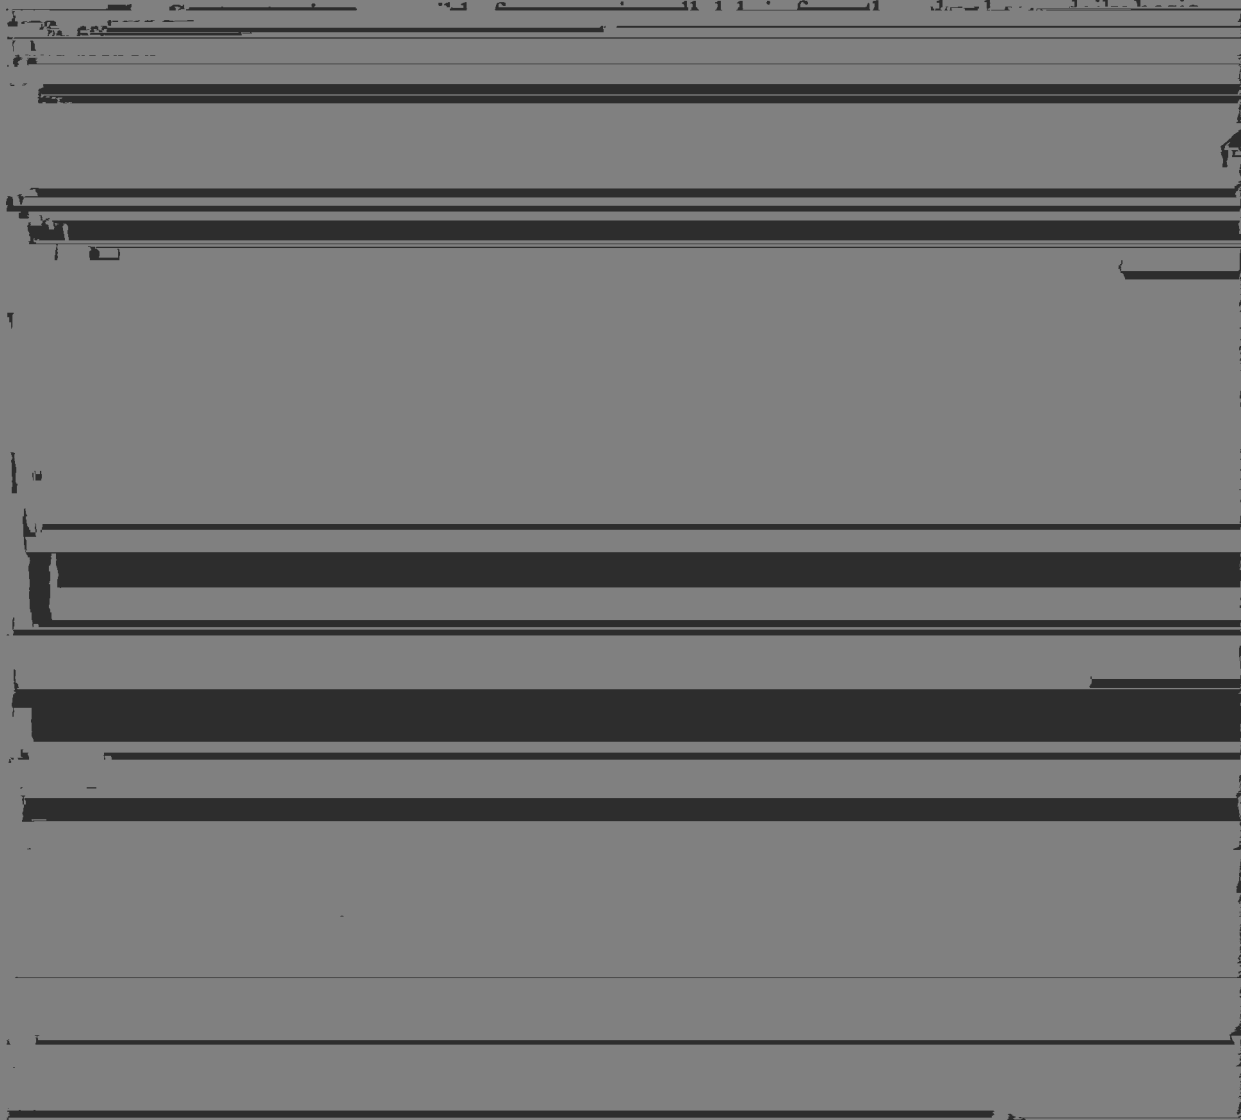






F. The Contractor will be responsible for proper floor preparation, cleaning, and as recommended by manufacturer installation instructions.

G. All floors after the removal of existing materials will be cleaned or sanded to remove glue or loose patch. All new LVT flooring areas will be floated 100% with Ardex feather light leveling compound and inspected by the Owner prior to installing new LVT. All new carpet bad areas will be patched only with ARDEX.

H. Base Bid A: 1) J.D. Lever Elementary add \$30,000.00 allowance to base bid.

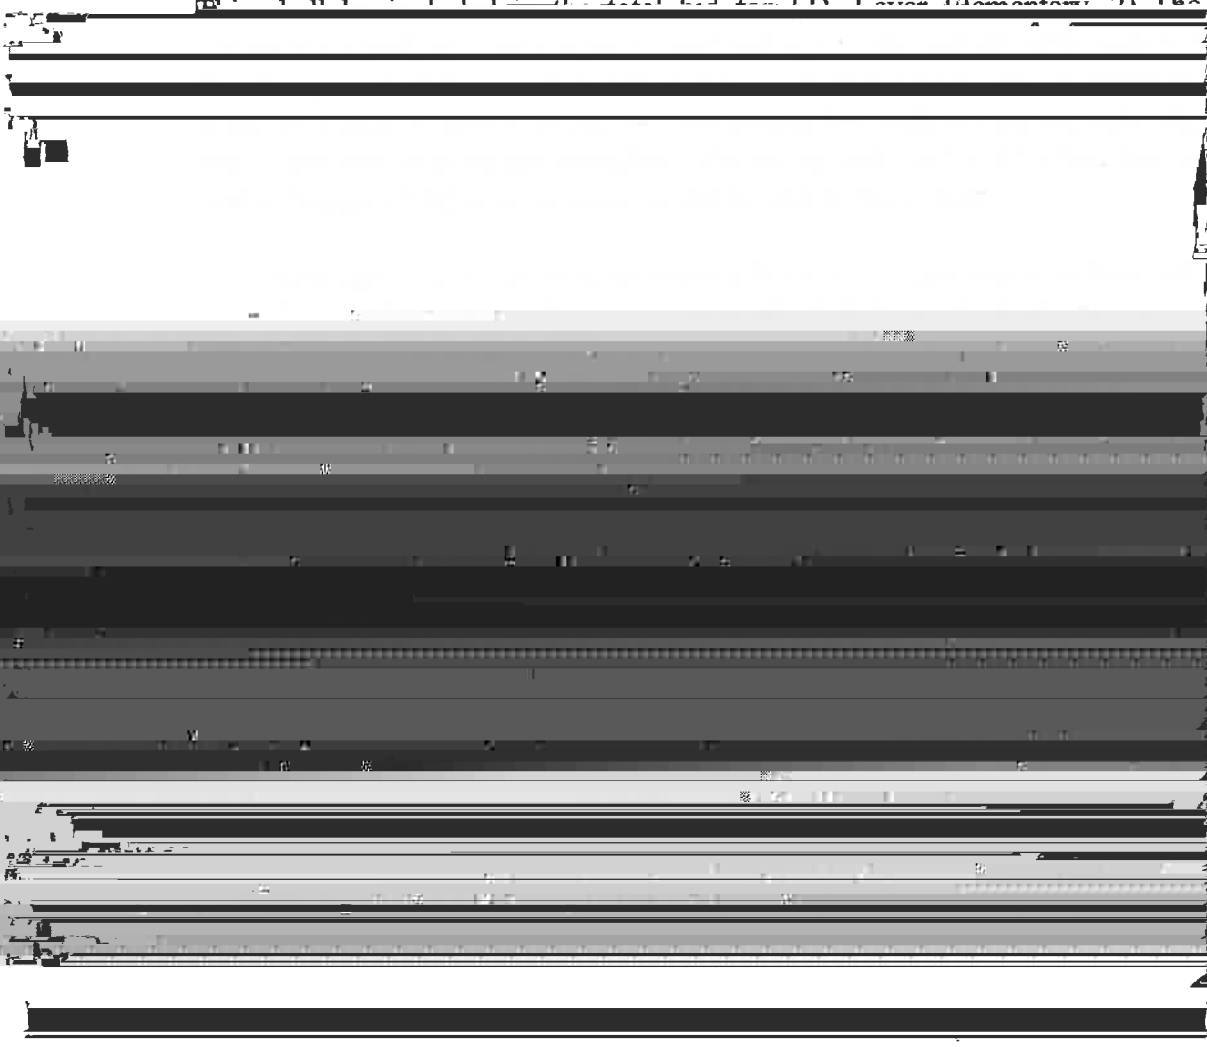

B. Job Conditions:

1. Maintain minimum temperature of 65°F in spaces to receive resilient flooring for at least forty eight (48) hours prior to installation, and not


less than forty eight (48) hours after installation as recommended by

flooring manufacturer.

2. The Contractor is responsible for notifying the Owner if floor substrate is not per manufacturer or specification tolerance or other

E. Warranty (LVT/Vinyl Base) and Carpet:

All materials used are to be warranted by the manufacturer and the Bidder to provide the Owner with warranty for a period of one (1) year after final completion and acceptance by the Owner. All workmanship and installation

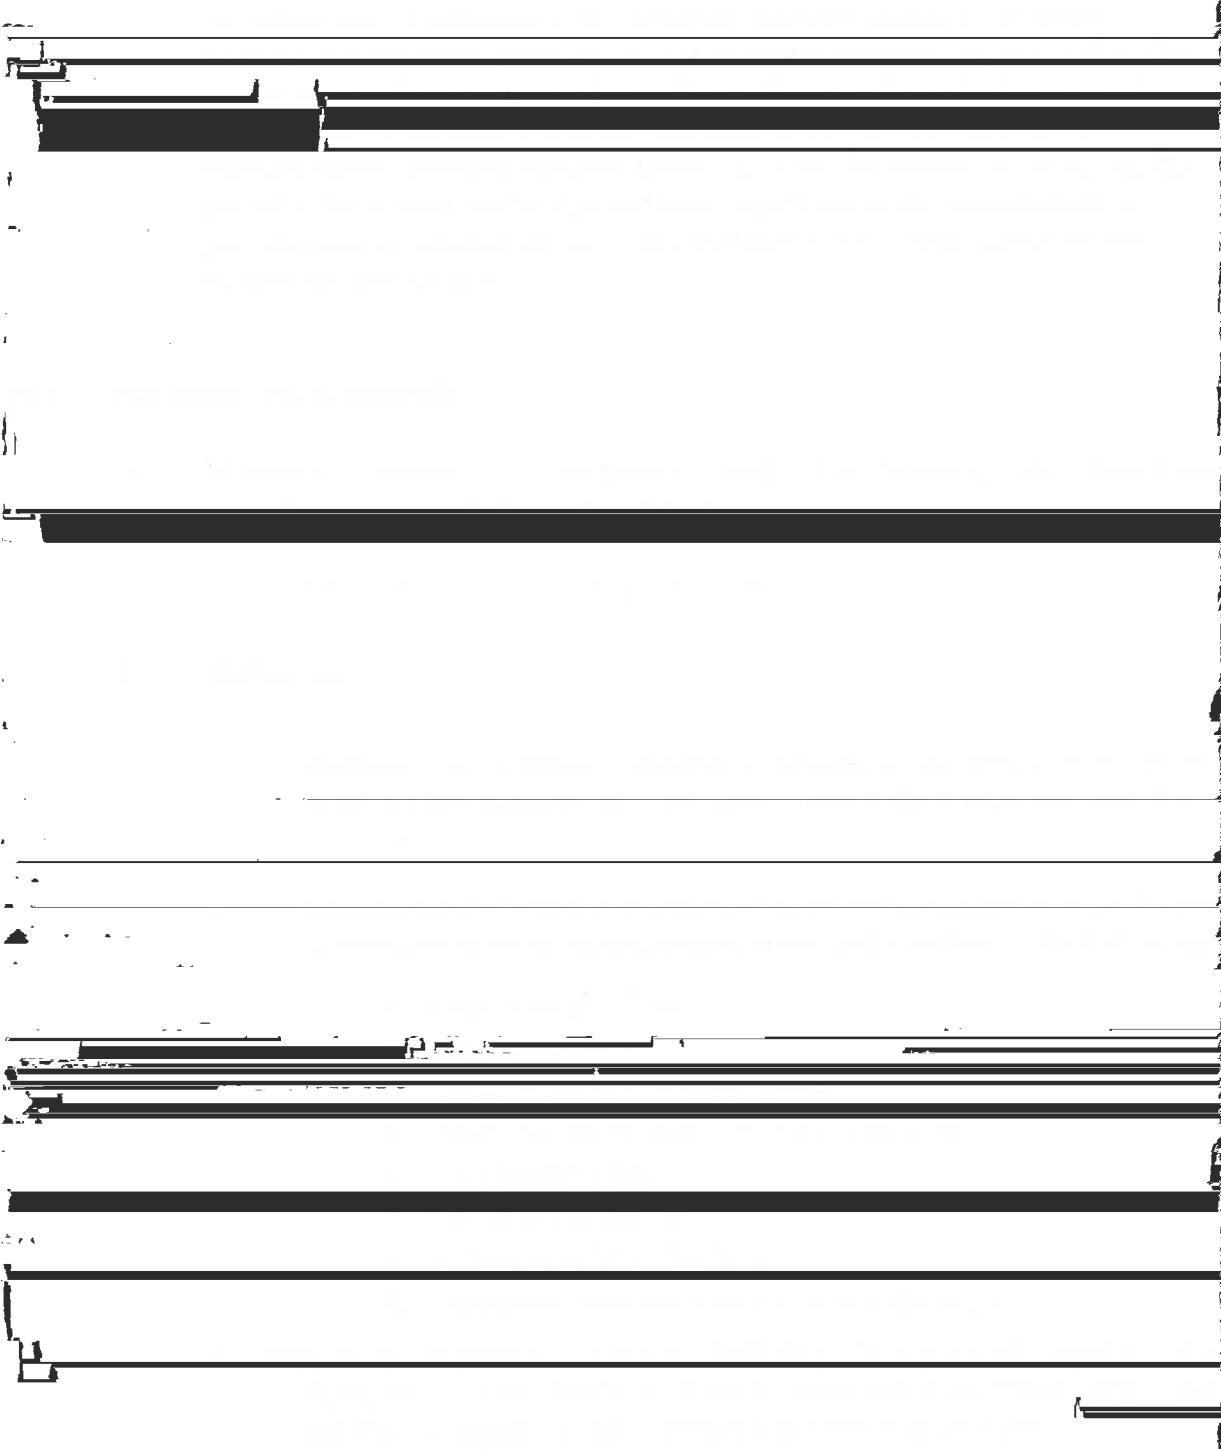

C. Extra Stock:

1. Furnish and deliver to the Owner material from same manufactured lot as material installed and enclosed in protective packing with appropriate labeling.
2. Provide at least one (1) box for each fifty (50) boxes or fraction thereof, ~~for each carpet color, pattern, and size installed at the start of the project~~

This works out to be 2% of carpet will be left for extra stock. Turnover the carpet and have the Facilities Construction Department sign off on acceptance of the extra stock. The Owner decides amounts of adequate colors.

### 19.1 INSTALLATION ACCESSORIES

- A. Trowel able Leveling and Patching Compounds: Latex-modified, hydraulic cement-based formulation provided by or recommended by the following: Carpet Manufacturer
- B. Adhesives: Water-resistant, mildew-resistant, non-staining type to suit products and subfloor conditions indicated, that complies with flammability requirements for installed carpet and that is recommended by the following:  
Carpet Manufacturer


1. Submit reports of alkalinity and moisture test.

B. Concrete Subfloors: Verify that concrete slabs comply with ASTM F 710 and the following:


1. Slab substrates are dry and free of curing compounds, sealers, hardeners, and other materials that may interfere with the adhesive bond. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by the following: Carpet Manufacturer

2. Subfloor finishes comply with requirements specified in Division 3 Section "Cast-in-Place Concrete" for slabs receiving carpet.

3. Subfloors are free of cracks, ridges, depressions, scale, and foreign deposits.

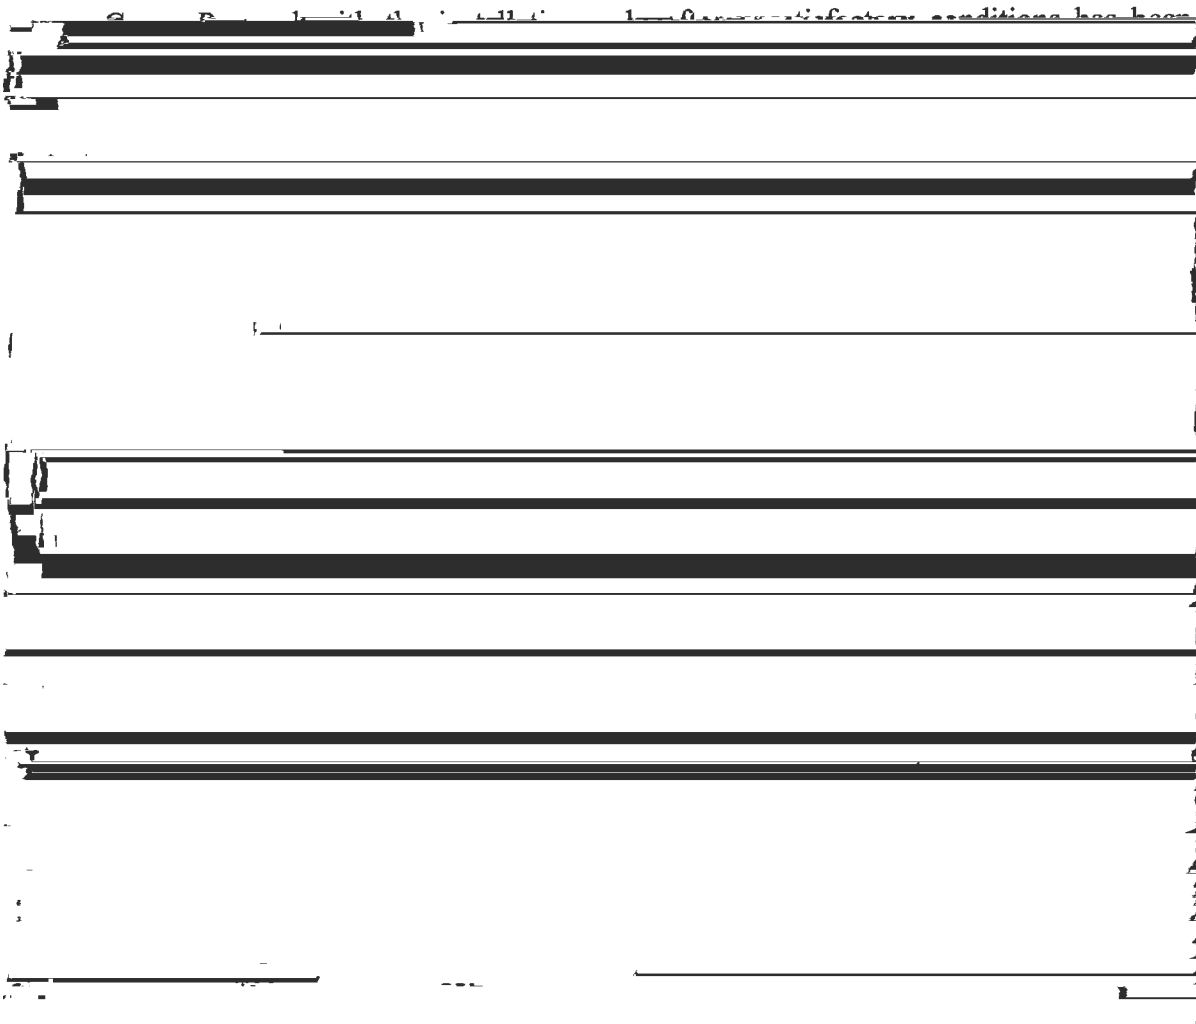



- B. Comply with carpet manufacturer's recommendations for seam locations and direction of carpet; maintain uniformity of carpet direction and lay of pile. At doorways, center seams under the door in closed position.
  - 1. Bevel adjoining border edges at seams with hand shears.
  - 2. Level adjoining border edges.

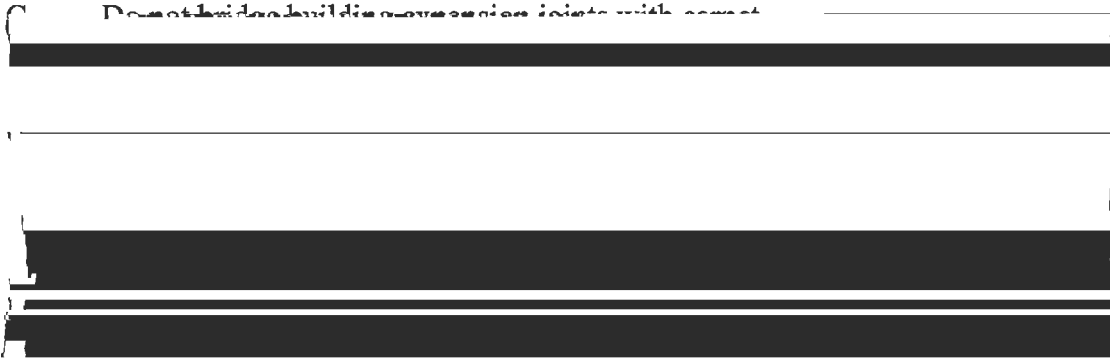

**21.0 PRODUCTS: LVT TILE**

- A. Materials:
  - 1. Luxury Vinyl Tile: Specification ASTM F 1700, Class 111, Type B performance standards for solid vinyl floor tile
    - a. Milliken Fortified Foundation

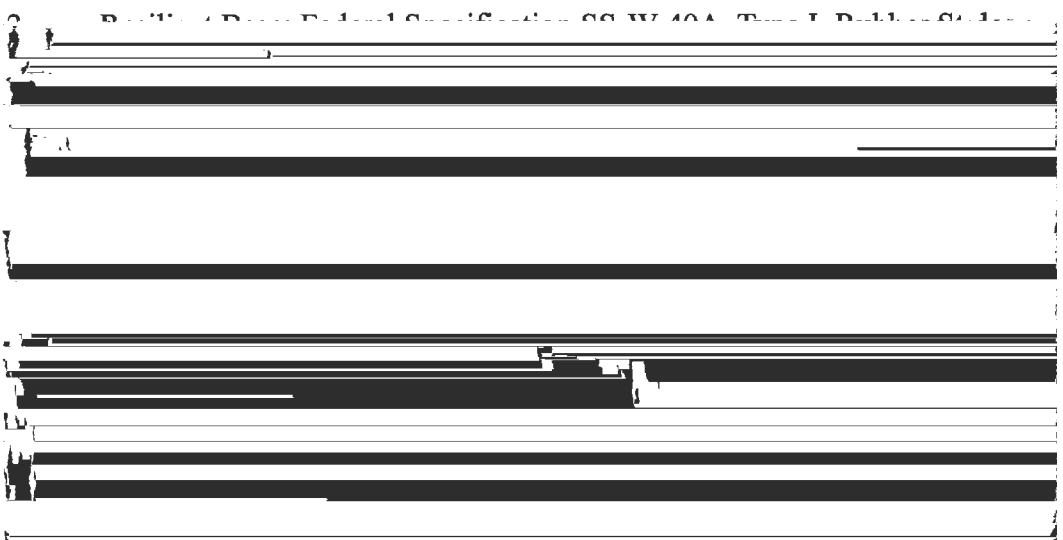

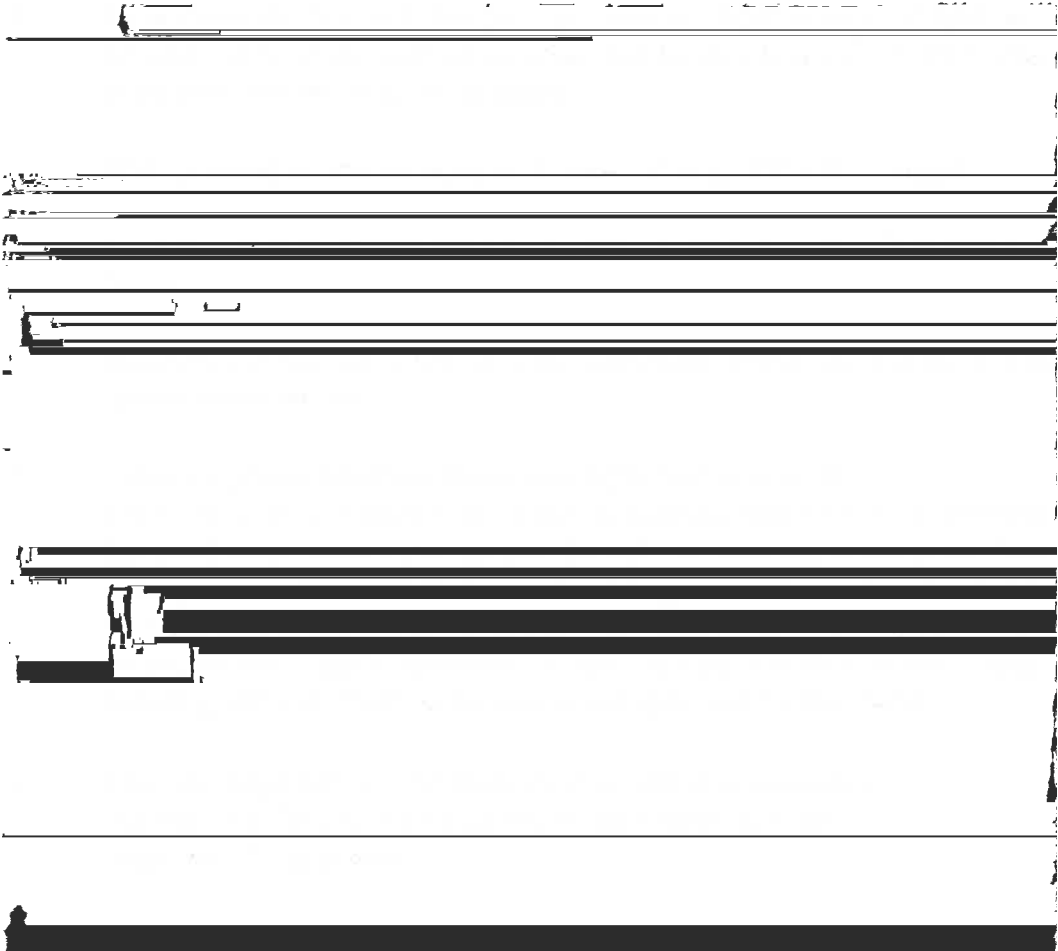


- a. Thickness: Minimum thickness of 3.00 mm.
- b. Wear Layer: Minimum of 20 mil wear layer.
- c. Protective Coating: Scratch/Scuff/Stain Resistant protection that is UV Cured.
- d. Warranty: Minimum twenty (20) year commercial warranty.

B. Execution

1. Preparation:


- a. Perform bond and moisture tests on any questionable areas to insure "good" bonding and prevent "shadowing" (show through). These tests are recommended for all areas; however, where obvious

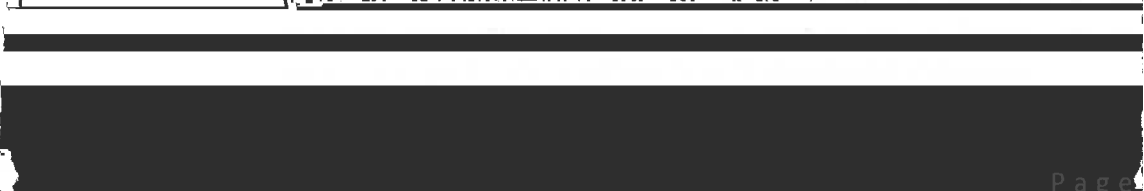


- b. Apply leveling and patching compounds as necessary and recommended by flooring manufacturer or noted in specification for new LVT areas will receive 100% leveling compound.
- c. Clean, vacuum, mop, vacuum, surfaces to be covered per manufacturer's recommendations.
- d. Call for inspection of prepped surfaces prior to new installation and review the layout of the new tile installation.

2. Installation:

- a. General: All installations will be done in strict accordance with manufacturer's recommendations. Colors and designs will be as specified in the contract documents.

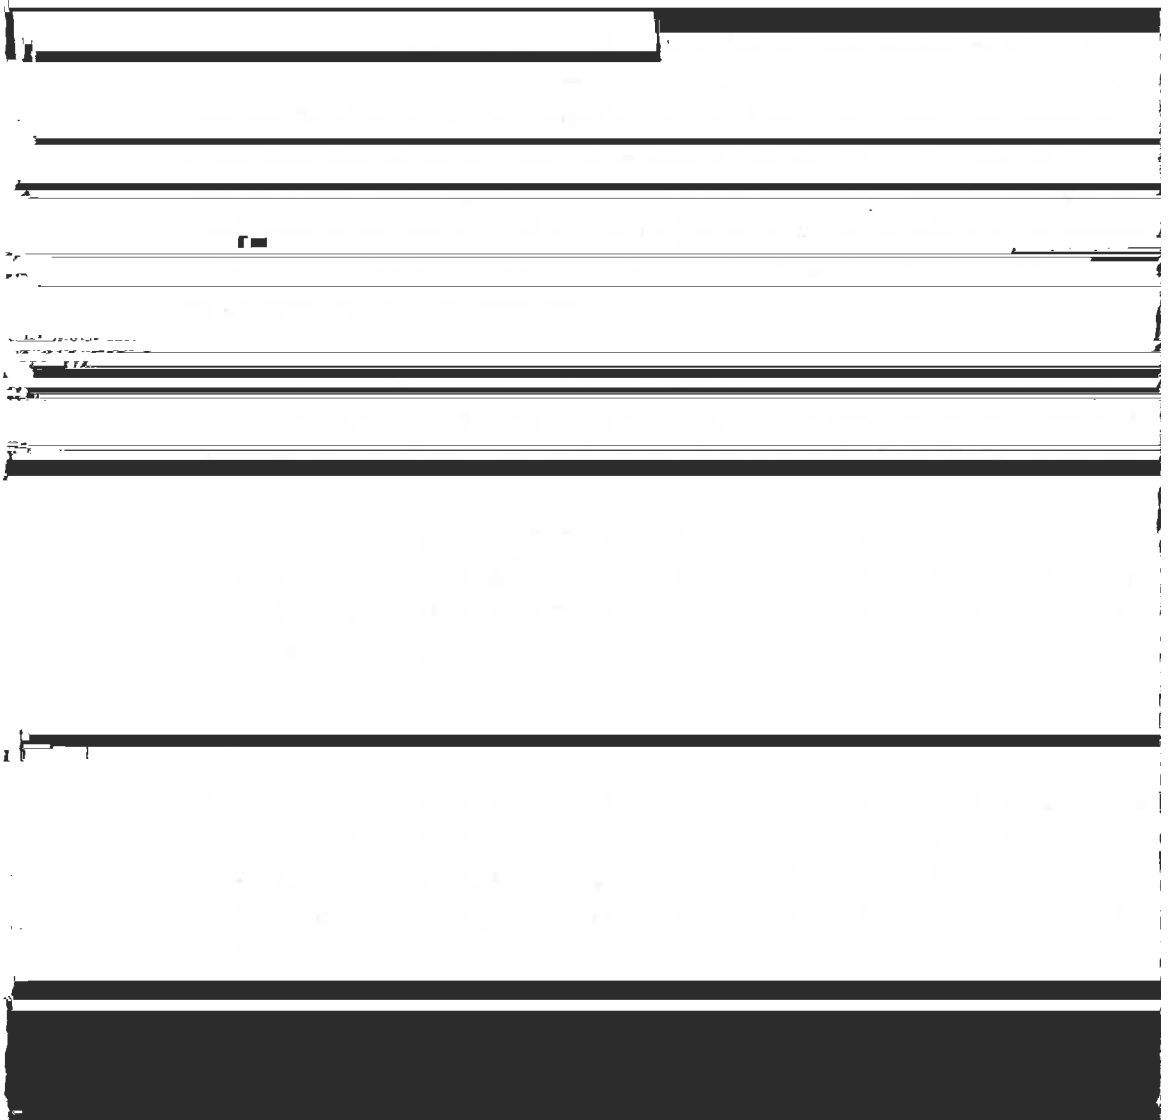




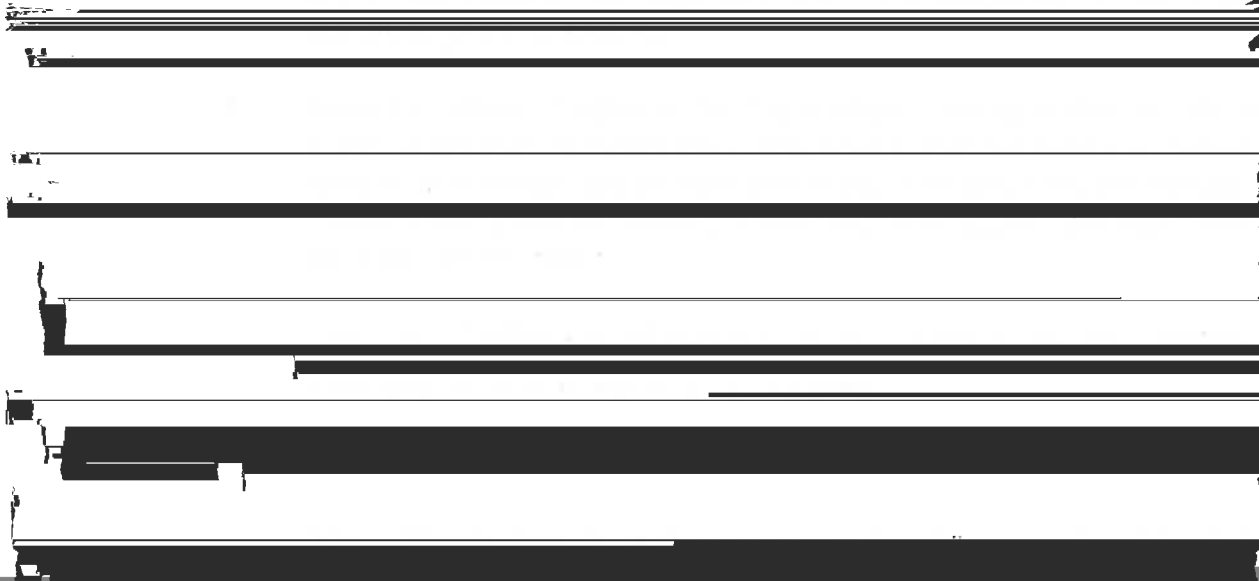

and dry to proper conditions.

4. Apply full spread of adhesive per manufacturer's recommendations; allow to setting per manufacturer's recommendations. Butt tile tightly to vertical surfaces as necessary and produce neat joints, laid tight, even, and straight.

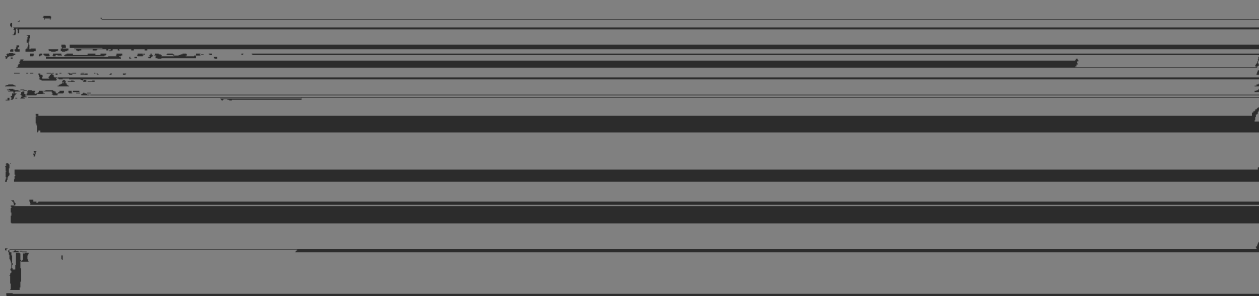

1. Remove all trash and debris.

b. Do not wash floors for at least eight (8) to ten (10) days after installation to prevent

~~moisture penetration or per manufacturer's recommendations.~~  
[REDACTED]

a. Furnish and deliver to the Owner materials from same manufactured lot as materials installed and enclosed in protective packing with appropriate labeling.

b. Provide at least one (1) box for each fifty (50) boxes or fraction thereof, for each type, color, pattern, and size installed at start of the project. This works out to be 2% of tile will be left for extra stock. Turnover the tile and have the Facilities Construction Department sign off on acceptance of the extra stock. The Owner decides amount of adequate colors.

5. Trimming Doors: Refer to the bid proposal form for unit prices for trimming doors, but adhere to the following:

e. ~~Where doors are dropping or rubbing the work from the Owner's side the bid~~

[REDACTED]

4. If trimming the door causes paint chipping, blemishes, marring, etc. Sand and refinish door and/or bottom (painting

smooth finish of same type as original finish.

5. Install door to its original function. Touch-up hinges and/or pins if required.

6. Hardware: See unit prices on bid proposal form.

- (a) After all floor mounted hardware is removed and sub-surfaces are filled, smoothed, and new tile is installed then install new wall mounted stops if CMU wall surface exists and stops can be installed with toggle bolts per manufacturer's

[REDACTED]

**22.0 PRODUCTS: Epoxy Flooring**

**GENERAL**  
[REDACTED]


2. Work of this Section as shown or specified shall be in accordance with the requirements of the Contract Documents.

[REDACTED]

[REDACTED]

3. [REDACTED]

a. Product Data for Credit MR 4.1 and Credit MR 4.2: For products having

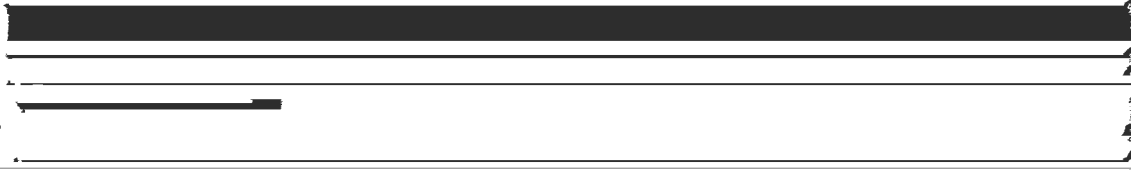


recycled content, submit documentation indicating percentages by weight of postconsumer and preconsumer recycled content.

b. Include statement indicating costs for each product having recycled content.

c. Include LEED Product Information Form for LEED Credits MR 4.1 and 4.2.

9. Product Data for Credit EQ 4.2: For field applied,

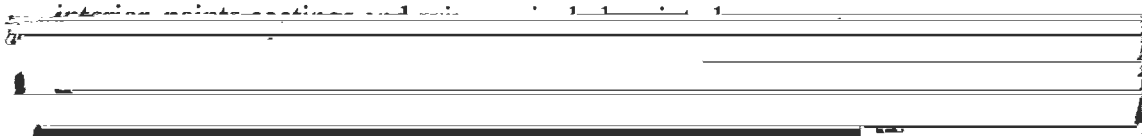


11. Samples for initial selection purposes in form of manufacturer's color charts showing range of standard colors available.

a. Submit 2-1/2" x 4" samples in color and quartz aggregate combination as selected.


12. Material certificates signed by manufacturer certifying that the decorative quartz epoxy flooring submitted complies with requirements specified herein.

13. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.

#### 14. QUALITY ASSURANCE

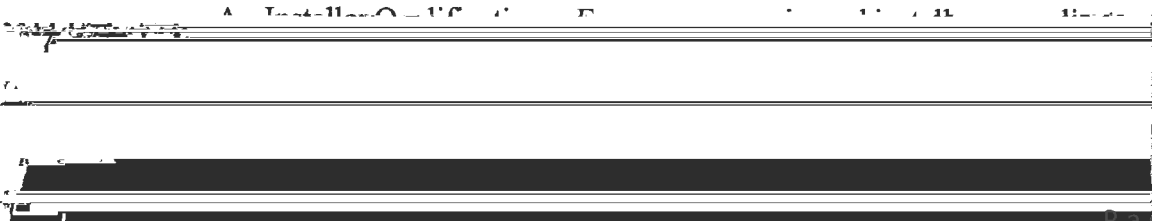

B Single-Source Responsibility: Obtain epoxy component of flooring materials, including primers, resins, hardening agents, and finish or

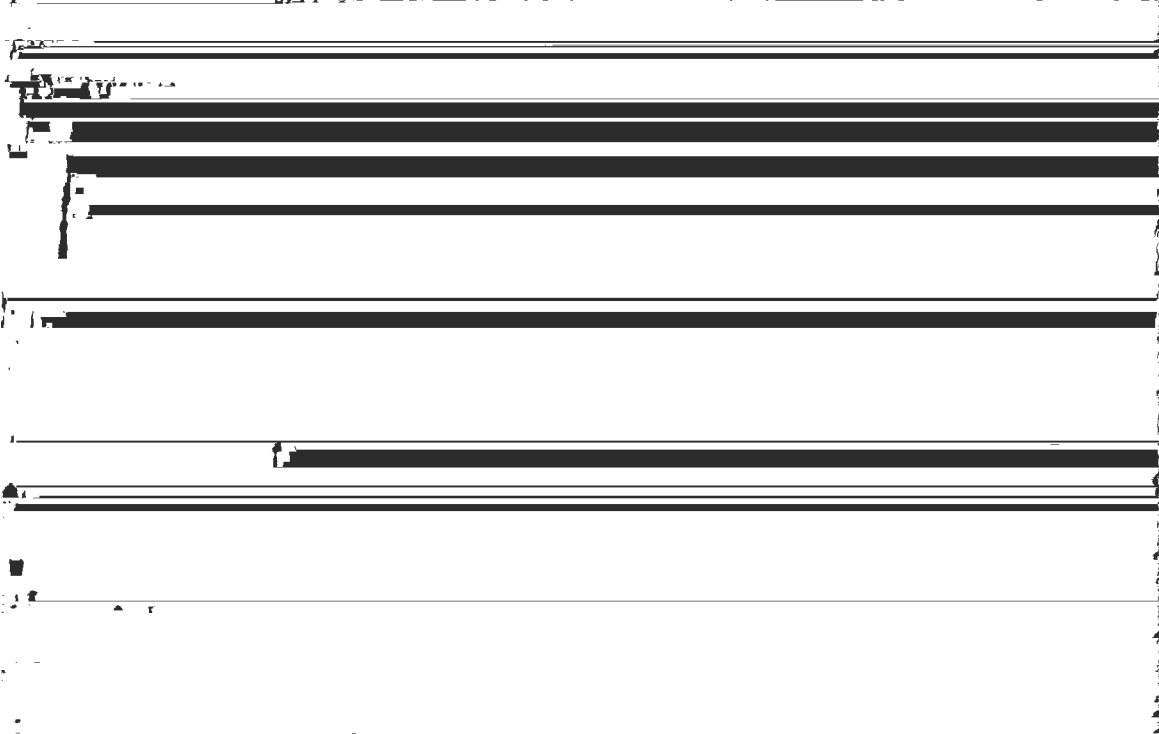

quartz aggregate from primary manufacturer of that product.



**17 PART 2-00 PRODUCTS**

**18. MATERIALS**

A. Decorative quartz epoxy flooring shall be Dex-O-Tex Decor-Flor as manufactured by Crossfield Products Corp. in Rancho Dominguez, California and Roselle Park, New Jersey.

**19. PROPERTIES**

A. Colors: As indicated, or if not otherwise indicated, as selected by Architect from manufacturer's standard color combinations.

B. Physical Properties: Provide flooring system that meets or exceeds the listed minimum physical property requirements when tested according to the referenced standard test method in parentheses.

Compressive Strength

Complete System (ASTM C109) 8,556 psi.

Resin Component (ASTM D695) 12,900 psi.

Surface Hardness (ASTM D2240)

Minimum D 95


Para. (4.7.3)

Aggregate Hardness (Moh's Mineral Scale)

6 1/2-7

**20. SUPPLEMENTAL MATERIALS**


- A. Waterproofing Membrane: Type recommended or produced by manufacturer of epoxy resin composition flooring system for type of service and floor condition indicated. **(Note to Specifier: The use of waterproof membrane is optional and is generally confined to suspended floors and in rooms having floor drains and subject to very wet spillage and service. All areas requiring membrane treatment should be clearly shown on plans and finish schedules.)**

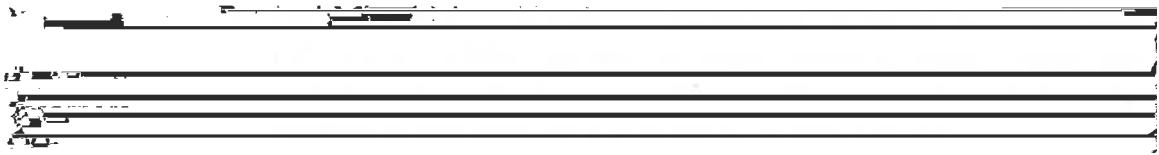

**PART 3.00 - EXECUTION**

**INSPECTION**

- C. Examine the areas and conditions where decorative quartz epoxy flooring is to be installed and notify the Architect of conditions

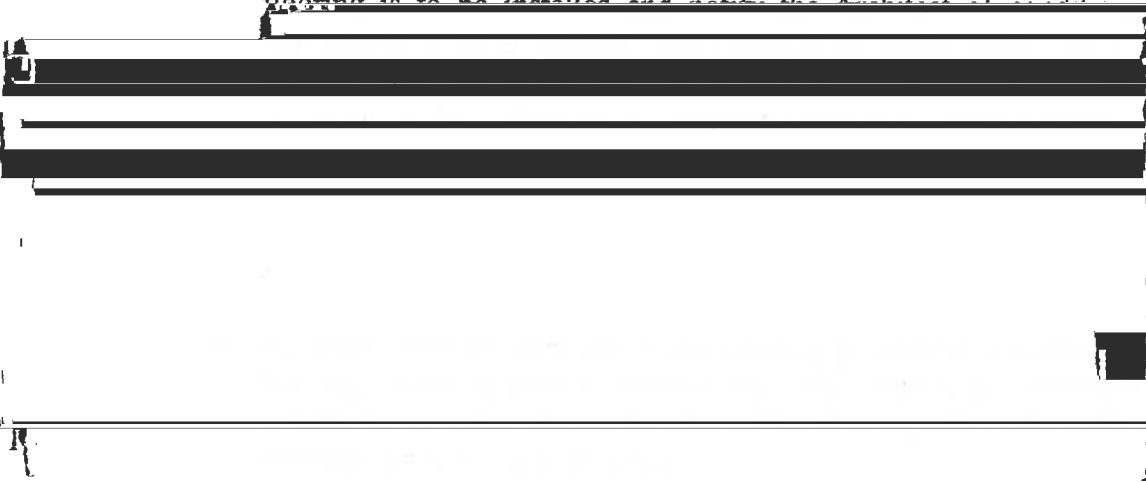



B. Concrete Surfaces: Shot-blast, acid etch or power scrub as required.

[REDACTED]

## 22. APPLICATION


A. General: Apply and finish in accordance with manufacturer's instructions.

[REDACTED]

- A. Cove Base: Apply cove base mix to wall surfaces at locations shown to form cove base height of 4 inches unless otherwise indicated. Follow manufacturer's printed instructions and details including taping, mixing, priming, troweling, sanding, and top-coating of cove base.

**23. CURING, PROTECTION AND CLEANING.**

- A. Cure decorative quartz epoxy flooring materials according to manufacturer's directions, taking care to prevent contamination during application stages and before completing curing process

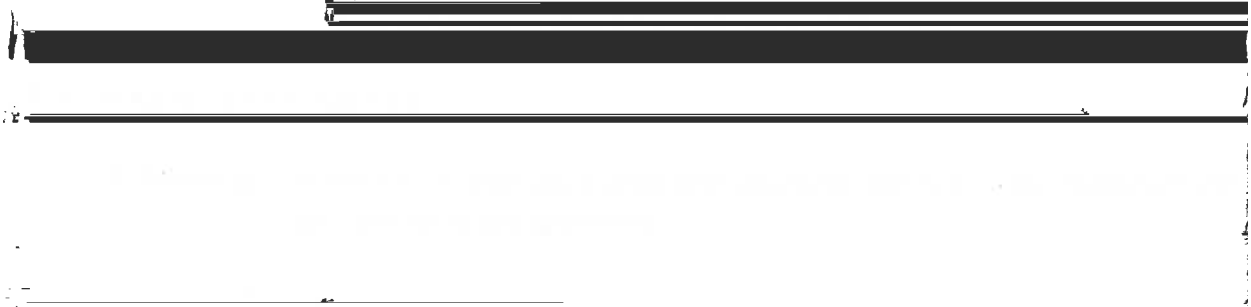

**B. Warranties:**

- 1. Definition of Lifetime: Lifetime is defined as the period from which material

**C. Installation:**

- 1. Direct glue down or loose-lay (with proper edging)

(Only fill out this form after completion of Project)

**CONTRACTOR'S ONE-YEAR GUARANTEE (MINIMUM)**

STATE OF: South Carolina

COUNTY OF: Aiken

PROJECT: 2024 Installation of Flooring at JD Lever Elementary School

PROJECT NAME:

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

By:

Title:

\*Must be executed by an officer of the contracting firm\*

Sworn to before me this                      day of                      , 2024

(seal) Notary Public for (State)

FORM OF PROPOSAL

DATE:

SUBJECT: Bidder's Proposal for "2024 Installation of Flooring at J.D. Lever Elementary School. "

TO: Kevin Chipman, Facilities Construction Department,

Arlene County Public Schools, 1001 1st St.,

FROM:

Address

Telephone Number

Fax Number

Email Address

The undersigned certifies that all materials and products offered must be guaranteed to meet the requirements of the specifications indicated, given, or referred to in the project manual entitled

**"2024 Installation of Flooring at J.D. Lever Elementary School"**

**Bid date: February 13, 2024**

NOTE TO BIDDER: In case of tie bids, the award will be determined according to the School District Procurement Code Section (V) (B) (2) (i).

**FAILURE BY THE BIDDER TO BID AN ALTERNATE(S) SHALL RENDER THE BID NON-RESPONSIVE.** An alternate shall be bid by indicating either a dollar amount or the words "No Change"

Drug Free Workplace Act (effective January 1, 1991) is a requirement if bid exceeds \$50,000.00

It will require a certification from you before this award becomes final. Please acknowledge and certify your compliance. The Bidder will acknowledge and certify compliance to the Drug Free

4. The Owner's intent is to award this project on a school-by-school basis.

5. Add the allowance for each school to the Bidder's base bid for additional scope of work

Project: **2024 Installation of Flooring at J.D. Lever Elementary School** for the complete project, including all applicable taxes, as described, and implied by plans and specification.

**BASE BID A:** Installation of carpet, LVT, cove base, and accessories as indicated at **J.D. Lever Elementary School**. Add \$20,000.00 allowance to base bid.

**Alternate 1:** Installation of LVT, cove base, and accessories to install flooring in two mobiles at **J.D. Lever Elementary School**. Add \$5,000.00 allowance to base bid.

Milliken: \_\_\_\_\_ Dollars (\$ \_\_\_\_\_)

Dollars:(\$ \_\_\_\_\_ )/EACH.

~~B Install floor-mounted dispensers per specifications.~~

Dollars:(\$ \_\_\_\_\_ )/EACH

c. Unit price per linear foot to install 4" vinyl cove base:

Dollars:(\$ \_\_\_\_\_ )/L.F



\_\_\_\_\_ Dollars:(\$ \_\_\_\_\_ . \_\_\_\_\_)/L.F.

E. Unit price for additional floor patch]floor leveler installation:

\_\_\_\_\_ Dollars:(\$ \_\_\_\_\_ . \_\_\_\_\_)/SQFT.


**LISTING OF SUBCONTRACTORS**

List all Subcontractors and floor material suppliers who will perform work or services. FOR BASE BID.

	Subcontractor's or Material Suppliers Name
	_____

- 1.
- 2.

NOTE: Failure to list Subcontractors and material suppliers in accordance with the code shall render the Prime Contractor's bid unresponsive. State shall be assumed to be South Carolina, unless shown otherwise. All work shall be assumed to be by the Bidder's own personnel, unless shown otherwise.

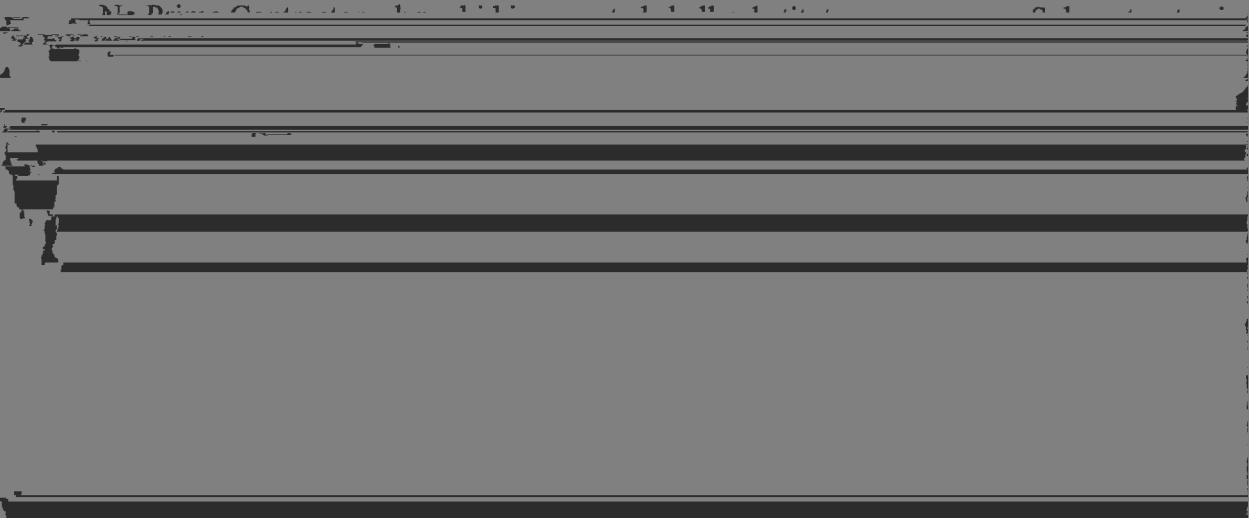

**SHIPPING TERMS:** \_\_\_\_\_

Time of delivery will be a factor in making this award.

**DATE FOR COMMENCEMENT AND SUBSTANTIAL COMPLETION**

The Undersigned hereby agrees to deliver to the Owner three (3) executed copies of the AGREEMENT within seven (7) days from the date set forth in the NOTICE TO PROCEED BY \_\_\_\_\_

[REDACTED]



Company Name of Bidder

Representative's Signature

Title

Address

Telephone Number

Fax Number

Email Address

**REQUIRED ATTACHMENTS:** Certificate of insurance bid security bond  
[Redacted]

**Contractor's Classifications and Licenses:**  
[Redacted]

(Classification)

(Sub classification)

(Limitations)

(S.C. Contractor/Specialty License Number)